



**MOUNTING**



TYPE	NET LUMEN OUTPUT (at Ta = 25 °C) (lm)	POWER CONSUMPTION (W)	SYSTEM EFFICACY (lm/W)	COLOUR RENDERING INDEX CRI (Ra)	CORRELATED COLOUR TEMPERATURE CCT (K)	WEIGHT (kg)	ORDER CODE	
							W1	W2
ENID W1/W2	445	12	37	80+	3000	1.5	832006	832003
ENID W1/W2	490	12	41	80+	4000	1.5	832004	832001

Luminous flux tolerance +/- 10%

# Enid W

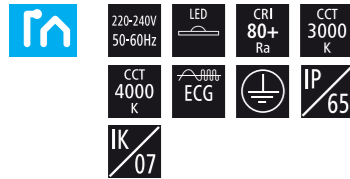

**EN**

**Mounting**  
Wall mounted (WMD)  
**Optical system**  
Opal diffuser (OPD)  
**Wiring**  
Electronic control gear FIX (ECG)  
**Materials**  
Housing: die-cast aluminium  
Diffuser: polycarbonate  
**Surface finish**  
Housing: NHG  
**Service lifetime**  
50,000 hours/L70/B50 (ta 25°C)  
**Ambient temperature**  
From -10 °C to +35 °C

**DE**

**Montage**  
Wandleuchte (WMD)  
**Optisches System**  
Opaler Diffusor (OPD)  
**Vorschaltgerät**  
Elektronisches Vorschaltgerät FIX (ECG)  
**Material**  
Körper: Aluminiumdruckguss  
Diffusor: Polycarbonat  
**Oberflächenveredelung**  
Körper: NHG  
**Lebensdauer**  
50,000 Stunden/L70/B50 (ta 25°C)  
**Umgebungstemperatur**  
Von -10 °C bis +35 °C

**FR**

**Montage**  
Applique murale (WMD)  
**Système optique**  
Diffuseur opale (OPD)  
**Équipement électrique**  
Ballast électronique FIX (ECG)  
**Matériels**  
Corps: aluminium moulé sous pression  
Diffusor: polycarbonate  
**Finition de surface**  
Körper: NHG  
**Durée de vie utile**  
50,000 heures/L70/B50 (ta 25°C)  
**Température ambiante**  
De -10 °C à +35 °C

**SK**

**Montáž**  
Montáž na stenu (WMD)  
**Optický systém**  
Opálový difúzor (OPD)  
**Elektrická výbava**  
Elektronický predradník FIX (ECG)  
**Material**  
Teleso: hliníkový odliatok  
Difúzor: polykarbonát  
**Povrchová úprava**  
Teleso: NHG  
**Servisná životnosť**  
50,000 hodín/L70/B50 (ta 25°C)  
**Teplota okolia**  
Od -10 °C do +35 °C

**ES**

**Montaje**  
Montaje en pared (WMD)  
**Sistema óptico**  
Difusor ópalo (OPD)  
**Cableado**  
Equipo de control electrónico FIX (ECG)  
**Material**  
Cuerpo: aluminio troquelado  
Difusor: policarbonato  
**Tratamiento de la superficie**  
Cuerpo: NHG  
**Vida útil**  
50,000 horas/L70/B50 (ta 25°C)  
**Temperatura ambiente**  
Desde -10 °C a +35 °C

**IT**

**Installazione**  
A parete (WMD)  
**Sistema ottico**  
Diffusore opale (OPD)  
**Cablaggio**  
Ballast elettronico FIX (ECG)  
**Materiali**  
Corpo: pressofusione di alluminio  
Diffusore: policarbonato  
**Finitura**  
Corpo: NHG  
**Durata di vita**  
50,000 ore/L70/B50 (ta 25°C)  
**Temperatura d'ambiente**  
Da -10 °C a +35 °C

**RU**

**Установка**  
Стена углопенная  
**Оптическая система**  
Матовый рассеиватель (OPD)  
**Электрическое оснащение**  
Электронный пускорегулирующий аппарат FIX (ECG)  
**Материал**  
Корпус: литой алюминий  
Рассеиватель: поликарбонат  
**Отделка поверхности**  
Корпус: NHG  
**Срок службы**  
50,000 часов/L70/B50 (ta 25°C)  
**Температура окружающей среды**  
От -10 °C до +35 °C



THE MANUFACTURER CONTINUES TO DEVELOP PRODUCTS THROUGHOUT THEIR LIFETIME. THEREFORE, THE COMPANY RESERVES THE RIGHT TO MODIFY MATERIALS, COMPONENTS, AND TECHNICAL PARAMETERS WITHOUT NOTICE. LUMINOUS OUTPUT AND ELECTRICAL LOAD HAVE AN INITIAL TOLERANCE OF +/- 10% FROM NOMINAL. FAILURE OF ONE LED LIGHT POINT WITHIN A LUMINAIRE DOES NOT IMPAIR FUNCTIONAL PERFORMANCE AND SO IS NOT CLASSIFIED AS REASON FOR COMPLAINT.